




MULTIPASS MULTITUBE HEAT EXCHANGERS

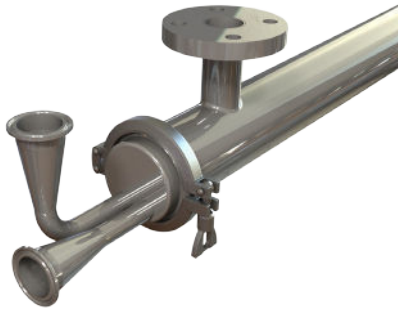

The HRS MP Series is a complete stainless steel multitube heat exchanger, its design is ideal for hygienic and industrial applications. Using multiple passes on the tube side offers greater flexibility for optimising fluid velocity, pressure drop and heat transfer.

The unique design creates longer thermal length within the same module, avoiding designs with multiple modules and interconnecting bends. Using HRS corrugation technology, both heat transfer and efficiency are increased over standard smooth tube heat exchangers. In addition, potential fouling is minimised.

TECHNICAL DATA

Low-Medium Viscosity Fluids
Food Industry Applications

External: Polished
Internal: <0.8µ
Other surface finishes available

Service Side: AISI 304/316L Stainless Steel
Product Side: AISI 316L Stainless Steel
Other material options available

Service Side: 10 bar/185°C
Tube Side: 10 bar/185°C

Service Side: Flange
Product Side: Clamp
All flange & clamp types available

- Multiple passes on tube side optimise fluid velocity, pressure drop and heat transfer
- Corrugated tubes for increased heat transfer
- Bellows are fitted to absorb differential expansion between shell and inner tubes
- Multiple units can be interconnected and have the option of frame mounting, insulation and cladding in stainless steel
- Passes can be configured to include 2/4/6 passes

MODELS	LENGTHS (m)	SURFACE AREA (m ²)	SERVICE SIDE CONNECTION	PRODUCT SIDE CONNECTION	SERVICE SIDE VOLUME (l)	PRODUCT SIDE VOLUME (l)
MP 6/X 76/18	0.7 - 6.0	2	DN40	1.5"	16.6	7.2
MP 12/X 104/18	0.7 - 6.0	4.1	DN65	1.5"	28.5	14.3
MP 18/X 129/18	0.7 - 6.0	6.1	DN80	2"	47.8	21.7
MP 36/X 168/18	0.7 - 6.0	12.2	DN80	3"	70.8	43.4

Possible tube lengths in meters: 0.7/1/1.5/2/3/6 m. The surface area and volumes shown are for 6m length models.

PD 5500, PED 2014/68/EU, ASME | FDA, TR CU 032, DOSH Compliant

HRS HEAT EXCHANGERS hrs-heatexchangers.com **UK Office** +44 (0)1923 232335 info@uk.hrs-he.com